

Crawler-Mounted Aerial Platform

HX64B

6.38m Platform Height




- Wide working ranges
- Hydraulic pilot control system
- Travel Speed: 1.6km/h
- Emissions Control Engine
- Low Noise Design

HITACHI



Working Range and Dimensions

Unit:mm

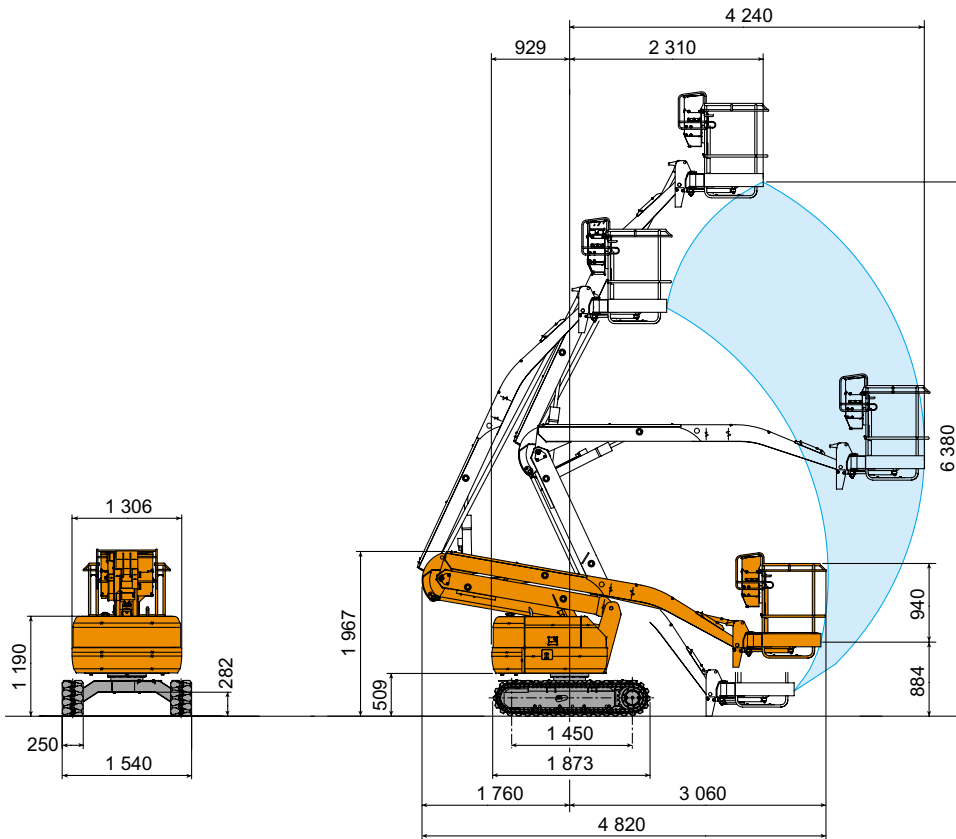

Specifications

| | | HX64B |
|-----------------------|-------------------------|------------------|
| Max. platform height | mm | 6 380 |
| Max. horizontal reach | mm | 4 240 |
| Platform capacity | kg | 150 |
| Platform swing angle | degree | Left 90 Right 45 |
| Machine weight | kg | 2 150 |
| Speed | | |
| Boom Raise / Lower | s | 17.5 / 13.5 |
| Arm Extend / Retract | s | 16 / 13.5 |
| Swing | min ⁻¹ (rpm) | 1.0 (1.0) |
| Travel High / Low | km / h | 1.6 / 0.8 |
| Platform swing | degree / s | 135 / 10 |

| | | HX64B |
|----------------------|---|--------------------------|
| Engine | | |
| Model | Kubota D722 | |
| Type | Water-cooled, 3-cylinder, swirl chamber | |
| Rated power | kW/min ⁻¹ (PS/rpm) | 8.8 / 2 300 (12 / 2 300) |
| Tank capacity | | |
| Fuel tank | L | 30 |
| Hydraulic oil tank | L | 30 |

Note: Data is expressed in SI units, followed by reference data in conventional units.

These specifications are subject to change without notice.

Illustrations and photos show the Japanese models, and may or may not include optional equipment, accessories, and all standard equipment with some differences in color and features.

Hitachi Construction Machinery Co., Ltd.

Head Office: 5-1 Koraku 2-chome, Bunkyo-ku,
Tokyo 112-8563, Japan

Telephone: (03)3830-8050

Facsimile: (03)3830-8202

KA-E114

02.07 (KA/KA, HT₃)

Printed in Japan