



**S130** | Compact Loaders



## Machine Rating

Rated operating capacity (Bobcat)	590 kg
Tipping capacity	1195 kg
Pump capacity	64.00 L/min
System relief at quick couplers	22.4-23.1 MPa
Max. travel speed	11.8 km/h

## Engine

Make / Model	Kubota / V2203-M-DI-E2B-BC-3
Fuel	Diesel
Cooling	Liquid
Maximum power at 2800 RPM (SAE J1995)	34.3 kW
Torque at 1700 RPM (SAE J1995)	150.0 Nm
Number of cylinders	4
Displacement	2194 cm <sup>3</sup>
Fuel tank	50.30 L

## Weights

Operating weight	2465 kg
Shipping weight	2128 kg

## Controls

Vehicle steering	Direction and speed controlled by two hand levers
Loader hydraulics tilt and lift	Separate foot pedals or optional Advanced Control System (ACS) or Selectable Joystick Controls (SJC)
Front auxiliary (standard)	Electrical switch on right-hand steering lever

## Drive System

Transmission	Infinitely variable tandem hydrostatic piston pumps, driving two fully reversing hydrostatic motors
--------------	---

## Standard Features

High-back cushion suspension seat	Instrumentation
Automatically activated glow plugs	Lift arm support
Auxiliary hydraulics: variable flow/maximum flow	Operating lights, front and rear
Bob-Tach™ frame	Parking brake
Bobcat Interlock Control System (BICS)	Seat belt
10 x 16.5, 10-ply, Heavy duty tyres	Seat bar
Deluxe operator cab* Includes interior cab foam, side, top and rear windows, Deluxe wire harness, dome light, and electrical power port <sup>1</sup>	Spark arrestor muffler
Electrically activated proportional front auxiliary hydraulics	CE certification
Engine/hydraulics system shutdown	Warranty: 12 months or 2000 hours (whichever occurs first)
<small>1. Roll Over Protective Structure (ROPS) – meets requirements of SAE-J1040 and ISO 3471; Falling Object Protective Structure (FOPS) - meets requirements of SAE-J1043 and ISO 3449, Level I</small>	


## Options

Deluxe instrument panel	10 x 16.5, 10-ply, Severe duty tyres
Power Bob-Tach™	12 x 16.5, 12-ply, Severe duty tyres, poly filled
Cab enclosure with heating	Advanced Control System (ACS)
Hydraulic bucket positioning (including ON/OFF switch)	Advanced Hand Controls (AHC)
31 x 12-16.5, 10-ply, Superflotation tyres	Selectable Joystick Controls (SJC)
10 x 16.5, 10-ply, Heavy duty tyres	Back-up alarm
10 x 16.5, 10-ply, Heavy duty tyres, offset rims	Beacon

## Environmental

Operator LpA(98/37 & 474_1)	85 dB(A)
Noise level LWA(EU Directive 2000/14/EC)	101 dB(A)
Whole body vibration (ISO 2631-1) High speed	1.07 ms <sup>-2</sup>
Hand-arm vibration (ISO 5349-1) High speed	2.54 ms <sup>-2</sup>

## Dimensions

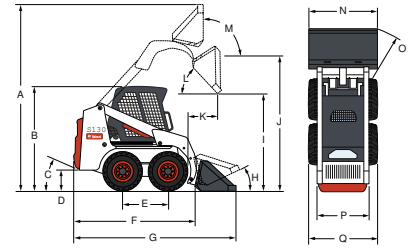

(A) 3543.0 mm	(J) 2781.0 mm
(B) 1964.0 mm	(K) 575.0 mm
(C) 23°	(L) 40°
(D) 188.0 mm	(M) 96°
(E) 900.0 mm	(N) 1575.0 mm
(F) 2432.0 mm	(O) 1745.0 mm
(G) 3152.0 mm	(P) 1247.0 mm
(H) 25°	(Q) 1490.0 mm
(I) 2100.0 mm	

## Attachments

Angle Brooms	Packer Wheels
Augers	Pallet Fork Accessories
Backhoes	Pallet Forks, Hydraulic
Bale Forks	Pallet Forks, Standard
Breakers	Planers
Brush Saws	Scarifiers
Bucket Adapters	Scrapers
Combination Buckets	Skeleton Buckets
Concrete Mixers	Snow & Light Material Buckets
Construction / Industrial Buckets	Snow Blades
Cutter Crushers	Snowblowers
Diggers	Snow Pushers
Dozer Blades	Snow V-Blades
Dumping Hoppers	Sod Layers
Feeding Buckets	Soil Conditioners
Fertilizer Buckets	Stabilizers
Flail Cutters	Sweepers
General Purpose Buckets	Tillers
Graders	Tilt-Tatch
Grapples, Farm - Utility	Tracks
Grapples, Industrial	Trench Compactors
Landplanes	Trenchers
Landscape Rakes	Utility Frames
Low Profile Buckets	Vibratory Rollers
Miscellaneous	Water Kits
Mowers	Whisker Brooms



www.bobcat.eu